


PHYSICAL DIMENSIONS:

A	3.20 [.126]	± 0.20 [.008]
B	1.60 [.063]	± 0.20 [.008]
C	0.80 [.031]	± 0.20 [.008]
D	0.40 [.016]	± 0.15 [.006]
D1	0.30 [.012]	± 0.20 [.008]
E	0.80 [.031]	± 0.10 [.004]


DA1206B601R-10

UNCONTROLLED DOCUMENT

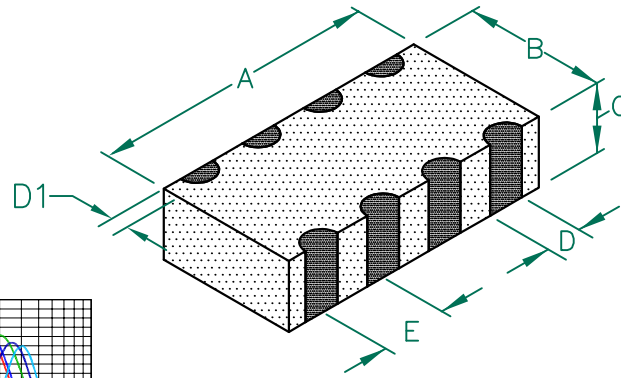


ELECTRICAL CHARACTERISTICS:		
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	600	
Minimum	450	
Maximum	750	200 mA


LINE TO LINE INSULATION RESISTANCE
>100 M Ω AT 75 VOLTS.

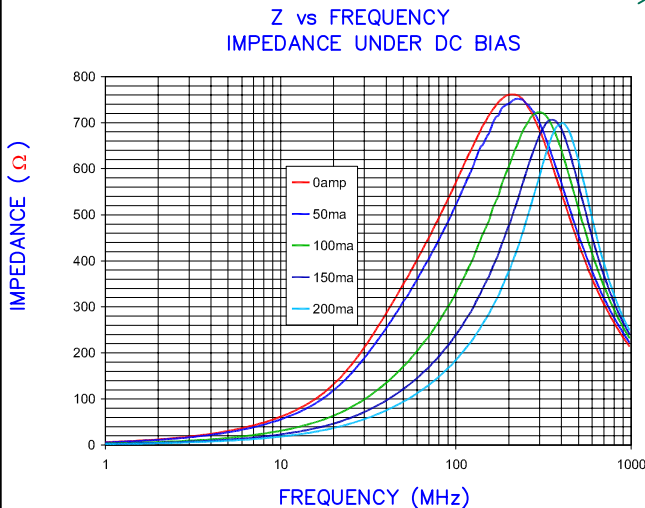


LAND PATTERNS FOR REFLOW SOLDERING

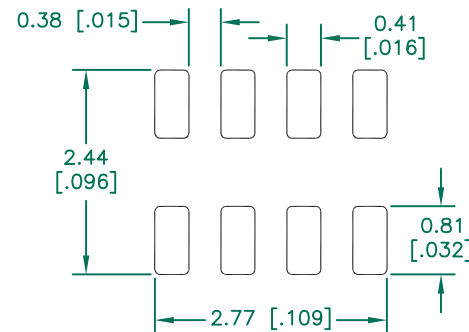

(For wave soldering, add 0.762 (0.030) to this dimension)

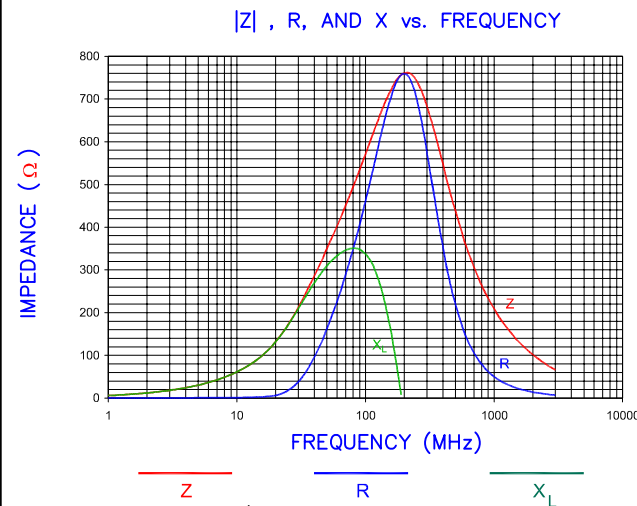

- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL EMBOSSED PLASTIC TAPE.
 2. TERMINATION FINISH IS 100% TIN.
 3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
 4. OPERATING TEMPERATURE TEMP: -40°C~+125°C (INCLUDING SELF-HEATING)

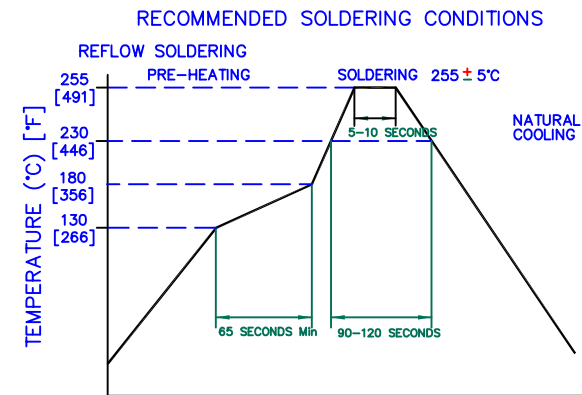

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
E	OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU				
D	UPDATE COMPANY LOGO	05/20/09	JRK				
C	D1 dim chgd from 0.008 ±0.004 to 0.012 ± 0.008. UPDATE COMPANY LOGO	10/30/07	JRK				
B	CHANGE DCR, MODIFY NOTE 1 ADD ROHS	11/30/06	JRK				
A	ORIGINAL DRAFT	03/30/04	TMB				
REV	DESCRIPTION	DATE	INT	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				DA1206B601R-10	E	CO-FIRE	TMB
				DATE: 03/30/04	SCALE: NTS	SHEET:	
				CAD # DA1206B601R-10-E	TOOL # -	2 of 2	

